Brought to you by SLS Select Education



einstein[®]Catalogue 2016



einstein[™] Imagine

if we could nurture every child's inquisitive nature into a passionate curiosity. We could **inSpire** a generation of young minds to pursue the answers that will change the world.



Our vision

Children start out eager to learn about the world around them, yet by the time students reach Key Stage 4, half of them have already decided science is not for them.

Research shows that the earlier you expose children to science, technology, engineering and maths (STEM), the more likely they are to succeed in STEM and pursue STEM careers.

SLS Select Education are excited to bring you the latest in data logging technology from Fourier Education. We don't merely want to expose kids to science; we are determined to add an extra spark to the classroom that drives students to become the next brilliant STEM leaders.

If you would like an on-site demo or further information don't hesitate to contact us to arrange a visit from your local area representative.

If we can get these tools into the hands of teachers and students, we can change the equation and help children find their inner scientist.

E: sales@science2education.co.uk W: www.science2education.co.uk/einstein T: 0115 982 2022 / F: 0115 945 5379

einstein™LabMate™+

the ideal solution for schools already equipped with tablets or computers

- Features 6 built-in sensors commonly used in most science curricula
- Connects to up to 8 external sensors
 simultaneously
- Pairs with any tablet or computer via Bluetooth or Micro-USB port
- Built-to-last sturdy design
- Runs experiments of over 24 hours without charging

Use the **einstein**TMLabMateTM+ with any of the free apps and software to enjoy the full platform:



einstein™World

More apps to come in 2016


More info on apps at www.einsteinworld.com







Collects data from up to



Also available:

- **einstein**™LabMate (without internal sensors)
- einstein™LabMate Link (low-cost solution)

LOG5009

£150.20 einstein[™] LabMate

LOG5006 €173.40 einstein[™] LabMate incl. HR finger clip



The award-winning, all-in-one **einstein**™Tablet**+**

- Full Android tablet with a built-in science lab
- Contains 8 built-in sensors, commonly used in most science curricula
- Connects up to 8 external sensors, from the over 60 in the **einstein**™catalogue
- Designed with NGSS and Common Core in mind, it can be used both in the science lab and also in a broader educational environment

The **einstein**™Tablet**+** includes free apps and software:




e Trackit!

More apps to come in 2016





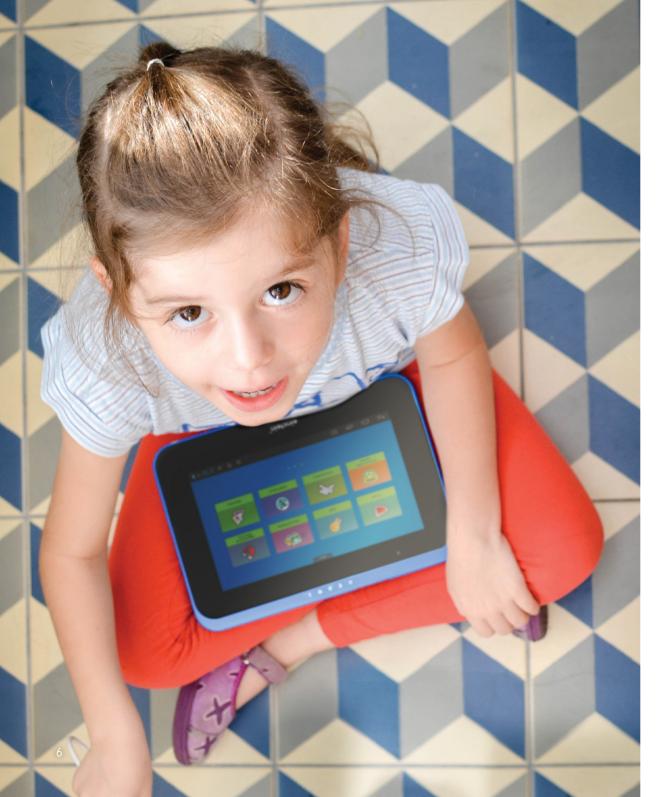

einstein™World

The **einstein**[™]World app runs interactive multimedia science activities designed by educators, publishers and students. Activities contain a self-guided, sensor-based experiment to be conducted by students.

einstein™World presents a new concept in inquiry-based science learning:

- Integrating videos and scientific principles and having students conduct experiments while taking their own measurements
- Enabling students to progress at their own pace via self-guided learning units, enhancing their work at home
- Promoting cross-disciplinary learning through engineering challenges






TrackIt! is a video motion analysis tool allowing you to move frame by frame through a movie, tracking the motion of a single object. TrackIt! is the perfect tool for teaching speed, acceleration, the laws of motion, and more.

- TrackIt! helps students understand and analyse an object's motion through plotted graphs
- Use pre-recorded video clips on your device or capture new footage from within the app
- Change placement of axis origin and pivot it 360° to control the x and y axes
- Analysis graphs to help understand the object's movement
- Scale tool to activate additional analysis graphs



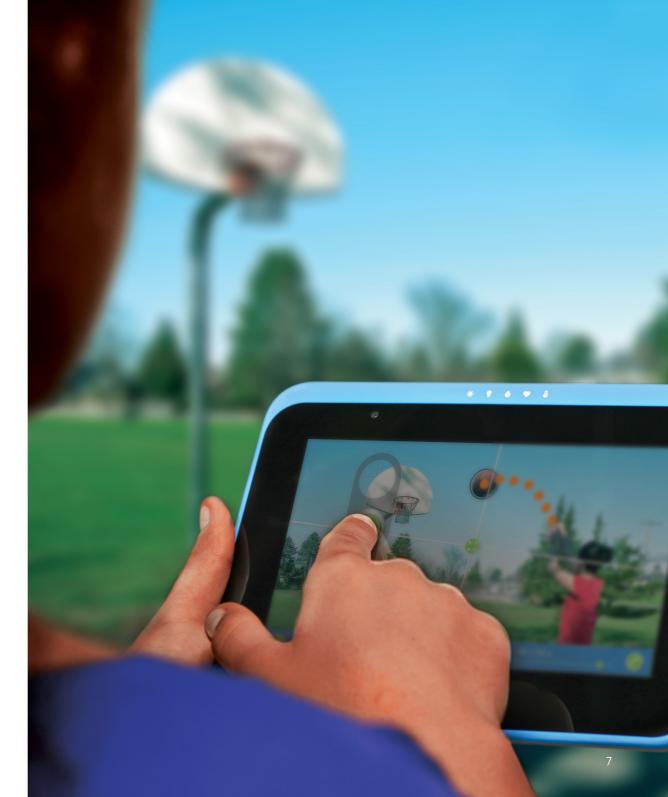



MiLAB[™] is an intuitive and user-friendly app that makes it easy to collect, visualise and analyse data, providing students with both basic and advanced tools for inquiry-based scientific discovery.


000

MiLAB™ features:

- Intuitive and simple interface
- Multiple data display modes: graphs, tables, metres and map
- Real-time data measurements via built-in and external sensors
- Export and share options
- Prediction tool, functions for advanced analysis, and video-sync abilities



*Multilab4 is now MiLAB™

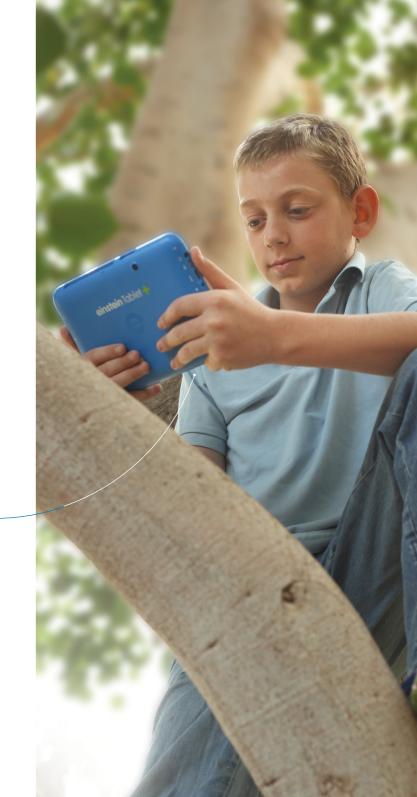

einstein™Activity Maker

Publishers, educators, and students can create multimedia, interactive, sensor-based science activities as easily as creating a slide presentation.

Activity Maker features:

- Works in multiple languages
- Uses web-based platform
- Integrates sensor-based data
 into presentations
- Encourages cross-curriculum
 development and collaborative work



einstein™Sensors



In the lab, use these sensors to measure the acceleration of a moving cart, pendulum or falling body or go outdoors to study acceleration of vehicles, amusement park rides, bungee jumpers and other moving objects.



Concentration Range:

5 μ M to 1M or 0.1 ppm to 14,000 ppm

Easily measure the ammonium ion (NH_4^+) level of a solution. Use it to study water quality, determine the ammonium level in foodstuffs and more.

* Electrode also sold separately

Wind Speed Range: 4 km/h to 280 km/h; 2.5 mph to 174 mph

Wind Direction Range: 0° to 360°

This 2-in-1 sensor measures wind speed and direction at different daily intervals or over a longer period.



Range: 0 to 375 mmHg

Measure blood pressure before and after exercise; investigate how blood pressure changes during the day or after physical activity.



Concentration Range:

0.5 µM to 1 M or 0.4 to 79,900 ppm

Easily measures the amount of bromide in a solution. Use it to study bromide levels in soil and water.

* Electrode also sold separately



Concentration Range: 0.5 μM to 1M or 0.02 ppm to 40,000 ppm

Measure the level of calcium in any solution in activities such as determining the hardness of water.

* Electrode also sold separately



Concentration Range: 5 µM to 1M or 1.8 ppm to 35,500 ppm

Study levels of chloride in fertilisers or conduct water quality studies with this sensor.

* Electrode also sold separately



Range: 350 to 10,000 ppm

With its broad dynamic range, this sensor can be used to measure a wide variety of CO₂ concentrations during photosynthesis and chemical reactions in Biology and Chemistry labs.



Wavelength:

Blue (480 nm) Green (500 nm) Red (650 nm)

Designed to determine the concentration of a solution by measuring its colour intensity, students can use this sensor to study the effect of light on chlorophyll levels in plants, the Beer-Lambert Law and more.



Range: 50 µS to 80 mS

Use this sensor to monitor changes in conductivity when dissolving salts in water, monitoring bodies of water for pollution or water salinity testing.

* Electrode also sold separately



These broad differential sensors are capable of measuring both direct and alternating current.



Range: 0 to infinity drops

Accurately record the volume of titrant added with this optical sensor.

* Sensor design may change



Range: 0.2 m to 10 m

Measure the distance of static and moving objects both near and far. Students can use this versatile sensor to investigate dynamic cart motion on a track, measure free fall acceleration and more.






Range: ±0.25 µC ±0.025 µC

This dual range, sensor can be used in activities like measuring the charge produced by friction, measuring charge by induction, investigating conductive and insulating materials and exploring the relationship between the charge and the voltage drop across a parallel plate capacitor.



Range: 0-3%

Easily measures the amount of ethanol in a solution. Use it to study ethanol as a renewable source of energy and the process of fermentation.



Range: 0 to 4.0 m/s

Measure the velocity of water flowing in a river, stream or canal.



Concentration Range: -1 μM to saturation or 0.02 ppm to saturation

Easily measures the amount of fluoride in a solution. Use it in Agriculture studies and Chemistry experiments

* Electrode also sold separately



Range: ±10 N ±50 N

Study friction, simple harmonic motion, impact in collisions or centripetal force with this sensor.



Range: 0 to 4096 Bq

This radiation sensor is used in experiments such as demonstrating the random nature of radioactive radiation, measuring activity vs. distance of a radioactive source and investigating the effect of different absorbers on radiation.



A standard Global Positioning System, helps students add the parameter of location to a variety of experiments.



Range : 0 to 250 bpm 0 to 5 V

Use these high accuracy sensors to measure an individual's fitness, and how factors such as level of activity, gender and size impact heart rate.





Range: 0 to 250 bpm

Use this sensor to compare or monitor heart rates before, during and after brief vigorous activity and monitor the time it takes the heart rate to return to normal.



This highly accurate combined sensor makes experiments involving temperature and humidity simple. Perfect for studies in Biology, Environmental Science and Human Physiology.



Range: 0 % to 100 % Relative Humidity

Learn about body respiration properties, biotic conditions and research the meteorological connections between humidity and temperature.

* Sensor design may change



Concentration Range:

1 μM to 0.1 M or 0.2 to saturation

Easily measures the amount of lead in a solution and in soil.

* Electrode also sold separately



Range: 0-600 lux 0-6000 lux 0-150,000 lux

These light sensors contain a high precision photoelectric cell that measures light intensity in activities such as solar radiation and photosynthesis.



Measuring magnetic field strength along three axes, this highly accurate sensor can be used to investigate the effects of the earth's magnetic field, a solenoid's magnetic field and the magnetic field of Helmholtz coils.



Range: 35 to 10,000 Hz

These sensors are designed to study the properties of sound waves such as the speed of sound through air and other materials, sound beats or harmonic properties of sound.



Concentration Range: 7 μM to 1 M or 0.1 ppm to 14,000 ppm

Conduct water quality studies and easily and accurately measure nitrate ions in aqueous solutions.

* Electrode also sold separately



Range: 0 to 14 mg/L DO

Measure oxygen concentration in solutions and fluids. Conduct investigation into oxygen consumption in aquariums and other bodies of water. Built-in temperature compensation makes this sensor highly accurate and easy to use.

 Image: Constraint of the sensor

 Image: Constraint of the sensor</td

Range: 0 to 14 pH

Measure pH changes during chemical reactions, follow an acid-base titration or examine bodies of water over long periods of time.

* Electrode also sold separately



Range: 0 to 3 V

This general-purpose sensor is commonly used for a wide variety of experiments such as studying the swinging of a pendulum swing, measuring the speed of a rolling object or measuring the speed of colliding objects.

* Electrode also sold separately



Concentration Range: 7×10^{-6} M to 1M or 0.04 ppm to 39,000 ppm

The potassium sensor can be used to measure pollution, agricultural fertilisers or the effects of food processing

* Electrode also sold separately



Range: 20 to 400 kPa or 0.2 to 3.9 atm or 200 to 4000 mbar

With their broad range, these pressure sensors can be used to monitor pressure changes. Use them in class to demonstrate phenomena such as Boyle's Law or Gay-Lussac's Law.

* Pressure Kit sold separately, see page 36.





Range:

15 to 115 kPa or 0.148 to 1.134 atm or 150 to 1150 mbar

This sensor can be used as an altimeter and as a barometer for various meteorological measurements. Investigating transpiration, measuring the respiration rate of germinating seeds and examining the Ideal Gas Law, all can be done with this sensor.

* Pressure Kit sold separately, see page 22.



Range: 0 to 819 mm

This sensor measures rainfall and is used in a variety of experiments in Climatology and Environmental Studies.



Range: ±360°

* Sensor design may change

Examine how objects move, accelerate and swing. This sensor and pendulum accessory help students explore topics such as the effects of gravity on objects in motion.

Range: 0 to 99 m/s

Measure the velocity and acceleration of moving objects. Learn Newton's laws of motion including Newton's second law with this smart pulley.



Concentration Range: 4 µM to 1 M or 0.1 to 23,000 ppm

Easily measures the amount of sodium in a solution. Use it for Agriculture studies, experiments on food and Chemistry studies.

* Electrode also sold separately



Range: 0 to 200 cbar

Measure the soil moisture's electric resistance and convert data into calibrated readings of soil moisture.



Range: 45 to 80 dB | 65 to 110 dB

Investigate environmental noises, room acoustics, sound level or sound isolation.





Range: ± 315 L/min ± 5.25 L/sec

Breathe into this sensor to measure total lung volume, tidal volume or forced vital capacity (FVC).

* Sensor design may change




Ambient Temperature An einstein™Tablet+ & einstein™LabMate+ built-in sensor.



Range: -30°C to 50°C

This internal sensor is useful for measuring ambient temperature and conducting experiments in micro-climates.






Range: -40°C to 140°C or 40°F to 284°F

This high accuracy surface temperature sensor enables exploration of topics such as skin temperature measurements and the effects of wearing light or dark-coloured clothing.



Range: - 40°C to 140°C or - 40°F to 284°F

This all-purpose temperature sensor is particularly well suited for conducting water and solution temperature measurements.



Range: -200°C to 400°C

This Platinum Resistance Thermometer (PRT) is ideal for use in the research of extremely low temperatures and it is also a very powerful sensor for monitoring liquids, gases and other materials.



Range:

0°C to 1200°C | 32°F to 2192°F | 273.15 K to 1473.15 K

The temperature TC-K sensor can be used in high temperature experiments such as monitoring chemical processes that occur at high temperatures, measuring the different temperature zones of a flame or simply monitoring ovens.

* Sensor design may change



Range: 0 to 200 NTU

This sensor measures the cloudiness of water due to industrial processes or environmental pollution.

* Sensor design may change



UV An einstein™ Tablet+ & einstein™ LabMate+ built-in sensor

Range : 0- 10 W/m² | 0-200 W/m² Wave length: 290-390nm

This sensor can be used mainly to measure UVA radiation.



Range UVA: 320nm - 400nm | 1 W/m² | 10 W/m² | 200 W/m²


Range UVB:

280nm - 320nm | 100mW/m² | 1 W/m² | 10 W/m²

Study the UV variations along a fluorescent tube, the invisible light from different sources or fluorescent rocks and dyes.



These low and medium range sensors can measure both AC and DC voltage and are used in experiments involving EMF and internal resistance, a light bulb and a diode, I-V characteristics of a diode, electric circuits, resistance of a wire or Ohm's Law.

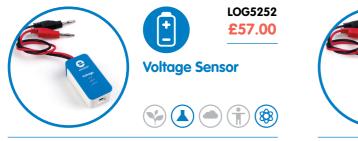

Triple range: $\pm 1 \text{ V} \mid \pm 10 \text{ V} \mid \pm 25 \text{ V}$

This broad range sensor can measure both AC and DC voltage and is used in experiments involving EMF and internal resistance, a light bulb and a diode, I-V characteristics of a diode, electric circuits, resistance of a wire or Ohm's Law.



Range: ±30 V TRMS Range: 0 to 21 V

This sensor not only has a broad range but can also conduct extremely accurate TRMS (True Root Mean Square) readings. Measures both AC and DC voltages and can be used in experiments involving EMF and internal resistance, alternative energy, electric circuits, resistance of a wire or Ohm's Law.

Contact

E: sales@science2education.co.uk W: www.science2education.co.uk/einstein T: 0115 982 2022 / F: 0115 945 5379

einstein™Kits



Micro Stirrer

Attach to any ISE electrode and use with a laboratory magnetic stirrer (not included) to enhance stirring of a solution near the electrode tip.

Pressure Kit

This kit contains accessories for use with any **einstein**™ Pressure Sensor.



Picket Fence

Commonly used with a Photogate Sensor (page 16) to measure position, velocity and acceleration vs. time.

LOG5273 £12.20

LOG5270 £34.90 LOG5276 £16.30 SOLAR LOG5261 £498.20 WIND LOG5264 £669.30 SOLAR


& WIND

LOG5267 £1464.30

TERRA NOVA™

Solar & Wind Renewable Energy Science Education Kits

TERRA NOVA[™] is comprised of 3 kits that explore solar energy, wind energy and a combination of the two. These hands-on-kits will advance the exploration of alternative energy technologies and their impact on everyday life.

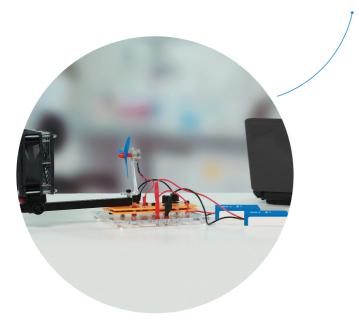


Dynamics System

Dynamics System is an ideal accessory for the high school Physics laboratory that lets students perform hands-on activities in the field of Mechanics, and it is also well suited for teaching Motion to KS3 students.

LOG5258 £299.00

einstein™Accessories



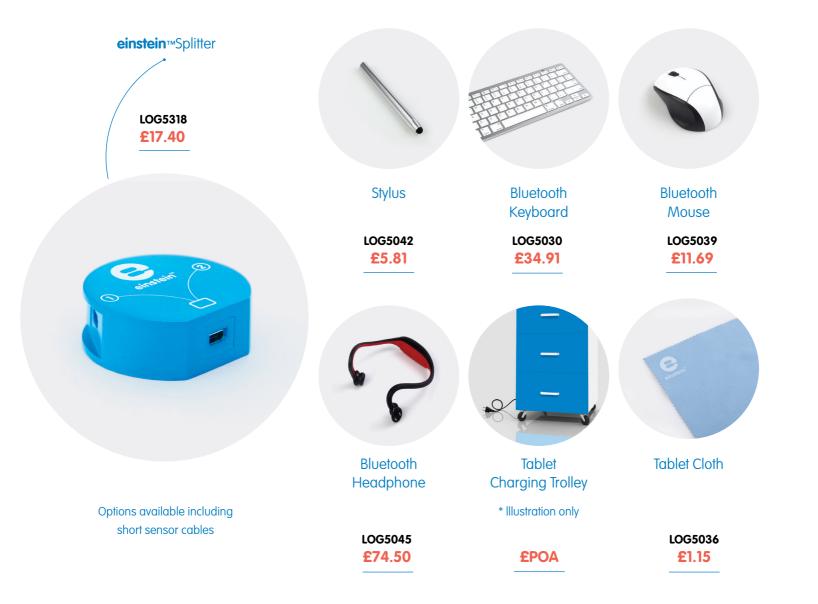



www.science2education.co.uk/einstein





ALBERT EINSTEIN and EINSTEIN are either trademarks or registered trademarks of The Hebrew University of Jerusalem. Represented exclusively by GreenLight. Official licensed merchandise. Website: einstein.biz

© 2014 Fourier Systems Ltd. All rights reserved. Fourier Systems Ltd. logos and all other Fourier product or service names are registered trademarks or trademarks of Fourier Systems. All other registered trademarks or trademarks belong to their respective companies.

einstein[™] World, LabMate, einstein[™] Activity Maker, MiLAB and Terra Nova, are registered trademarks or trademarks of Fourier Systems Ltd.

The Bluetooth® word mark and logo are registered trademarks owned by Bluetooth SIG, Inc.; microSD, is a trademarks of SD-3C; Apple, the Apple logo, iPad, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.; Android, Google, Google Play and other Google related marks are trademarks of Google Inc.; The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

Prices correct at the time of print. Errors & ommisions excepted.

Contact

E: sales@science2education.co.uk W: www.science2education.co.uk/einstein T: 0115 982 2022 / F: 0115 945 5379 SLS Select Education, Scientific Laboratory Supplies Ltd, Wilford Industrial Estate, Nottingham, NG11 7EP