
1. Relays

Code	Description	Pack	Price
LK4103	Relay reed changeover	Each	£61.72
LK5280	Relay 12V coil 10A normally open	Each	£28.75
LK5403	Relay 6V coil 10A normally open	Each	£34.10
LK5405	Relay reed	Each	£26.63
LK7889L	Relay 6V 10A changeover (2mm to 4mm lead)	Each	£29.20

1 locktronics

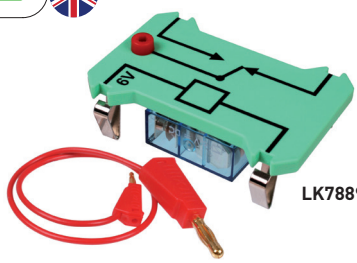


LK7889L

2. Sensors

Code	Description	Pack	Price
LK5401	Thermistor 470Ω NTC (DIN)	Each	£6.35
LK5402	Thermistor 4.7kΩ NTC (DIN)	Each	£6.35
LK4121	Voltage dependant resistor	Each	£8.93
LK6734	Hall effect switch	Each	£24.35
LK6850	Thermistor and moisture sensor PCB	Each	£6.64
LK8988	Thermocouple and carrier	Each	£37.00
LK6707L	Slotted opto sensor with 2mm to 4mm lead	Each	£49.97

2 locktronics

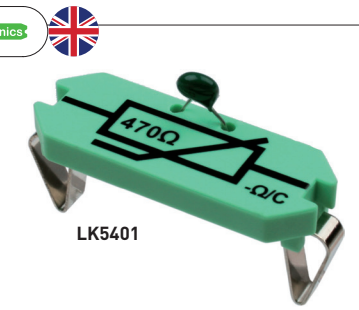

LK5401

3. Adjustable DC Power Supply

This switched mode power supply can output any of seven easily selected voltages - 3V, 4.5V, 5V, 6V, 7.5V, 9V and 12V. Up to 1A of current can be supplied at all voltage settings. Interchangeable mains plug adapters, and automatic mains voltage selection make it suitable for all countries which use UK, European, US, or Australian style mains sockets. The supply is also protected against overloads, short circuits, mains supply instability and overheating.

Code	Pack	Price
HP2666	Each	£12.81

3 locktronics



4. Lascells Battery Eliminator

A lightweight and compact power supply intended to reduce the science departments' need for batteries. The stepped output conveniently covers all key battery combinations from 1.5 to 12V. Output is via 4mm safety sockets with a max current of 1A. The unit is overload and short-circuit protected.

- Fully regulated output at battery voltages
- Eliminates the need for batteries in many applications
- Allows for extended experiments where battery life is an issue
- Input: 100 – 240V 50/60Hz, mains plug-top adaptor providing 15V d.c. 1.5A (supplied)
- Output: 1.5V, 3V, 4.5V, 6V, 9V, 12V
- Dimensions: 110 x 110 x 70mm
- Weight: 210g

Code	Pack	Price
EL1880	Each	£34.11

4 Lascells

